Kernel methods for Radon transform

Silvia Guglielmo*, Gabriele Santin*,†

sgugliel@studenti.math.unipd.it, gsantin@math.unipd.it
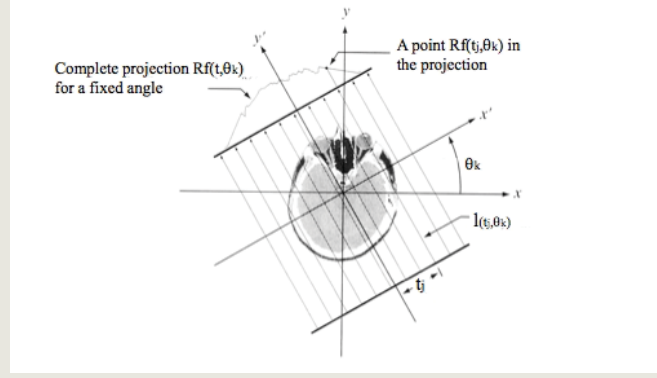
*Department of Mathematics, †Doctoral School in Mathematical Sciences

UNIVERSITÀ DEGLI STUDI DI PADOVA

RADON TRANSFORM

The mathematical model for the CT scan is the *Radon transform*. For a given bivariate function f on $[1, \ k]^2$, which represents the attenuation coefficient of a body slice on a grid of k^2 pixel, it is defined for each (t, θ) as:

$$\mathcal{R}[f](t, \theta) = \int_{\ell_{t,\theta}} f(s)ds = \int_{-\infty}^{\infty} f(t\cos(\theta) - s\sin(\theta), t\sin(\theta) + s\cos(\theta))ds$$

It has an explicit inversion formula: the Filtered back projection formula, that is the fundamental basis for image reconstruction tecnique based on inversion strategies. ART method, otherwise, is an approach based on linear algebra. While the **Fourier transform** approach solves continuous problem and then moves to discrete one, **ART** considers the discrete problem from the beginning. The image is formed by $k * k$ pixels, and defining pixel basis functions $b_1, b_2, \ldots, b_{k^2}$ we have the problem:

$$\mathcal{R}[f](t_j, \theta_j) = \sum_{i=1}^{k^2} x_i \mathcal{R}[b_i](t_j, \theta_j) \ \forall j = 1, \ldots, n.$$

THE MODEL

We seek for a generalized Hermite-Birkhoff approximation s of f as

$$s(x) = \sum_{j=1}^{n} c_j \mathcal{R}^y[\mathcal{K}_{w,w}(x, y)](t_j, \theta_j), \ \forall x \in [1, \ k]^2$$

where $\mathcal{K}_{w,w}$ is a **double weighted** version of an RBF kernel $\mathcal{K}$, namely

$$\mathcal{K}_{w,w}(x, y) = \mathcal{K}(x, y)w(x)w(y) = \varphi(\|x - y\|)w(\|x\|)w(\|y\|)$$

Then we ask that $\mathcal{R}^x[s]$ coincides with $\mathcal{R}[f]$ on the points (t_j, θ_j) for all $j = 1, \ldots, n$, which is equivalent to solve the linear system
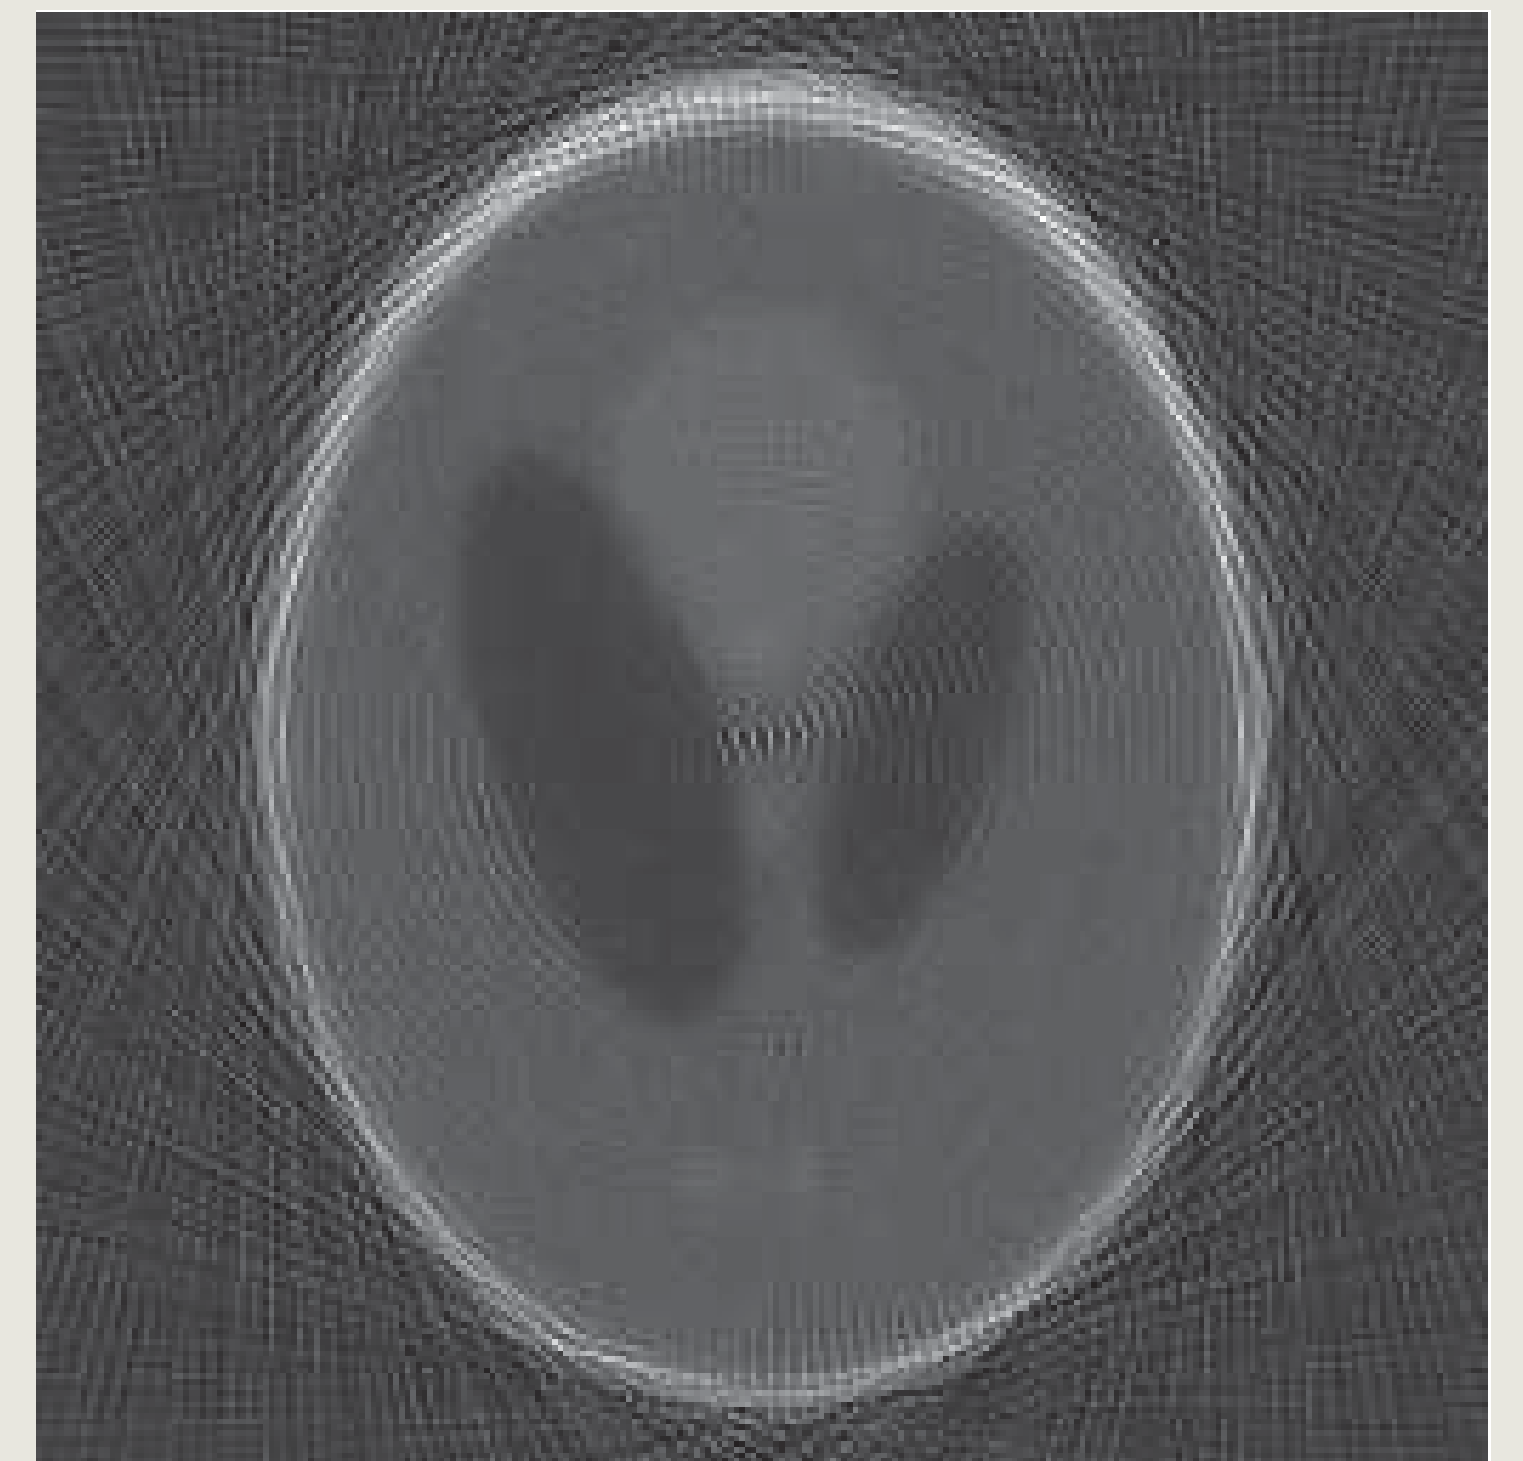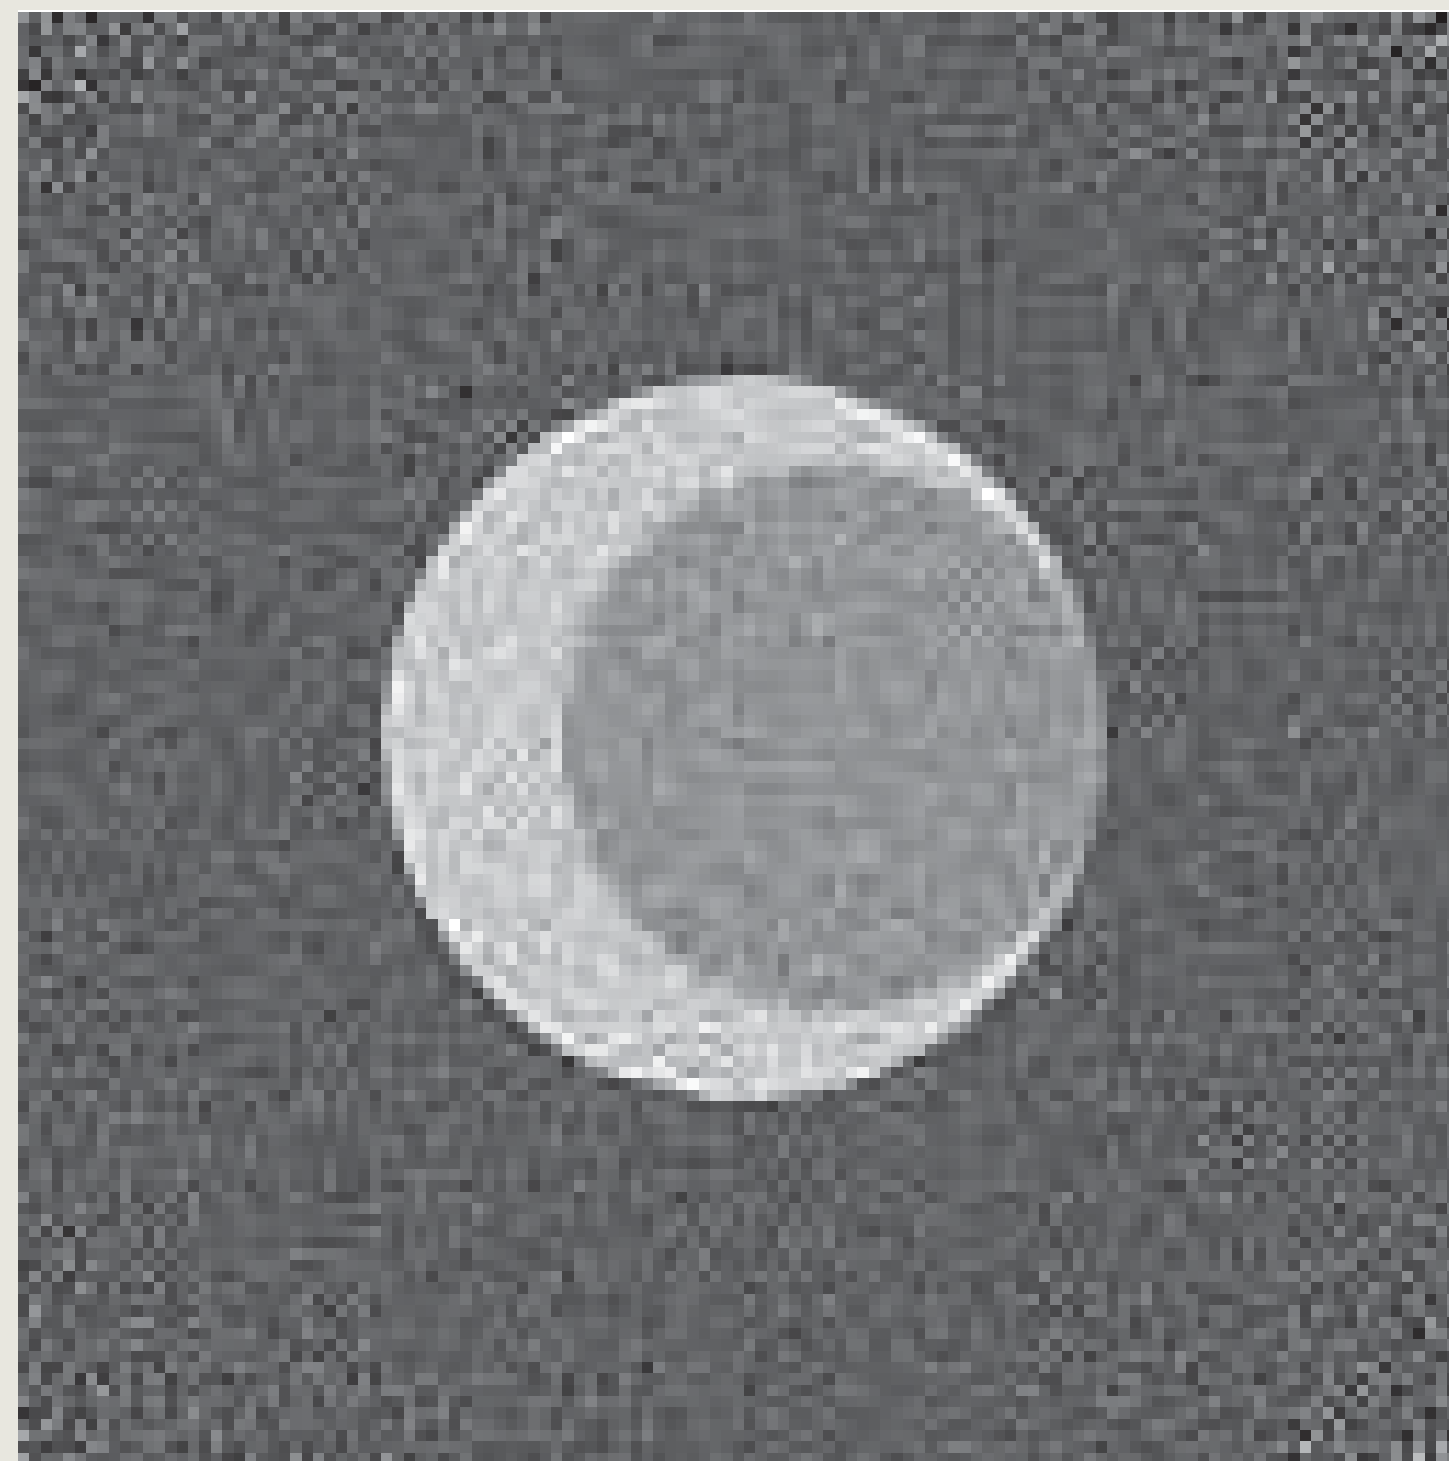
$$A_{\mathcal{K},\mathcal{R}} \cdot c = b, \quad \text{where}$$

$$(A_{\mathcal{K},\mathcal{R}})_{i,j} = \mathcal{R}_i^x[R_j^y[\mathcal{K}_{w,w}]], \quad b_i = \mathcal{R}[f]_i.$$
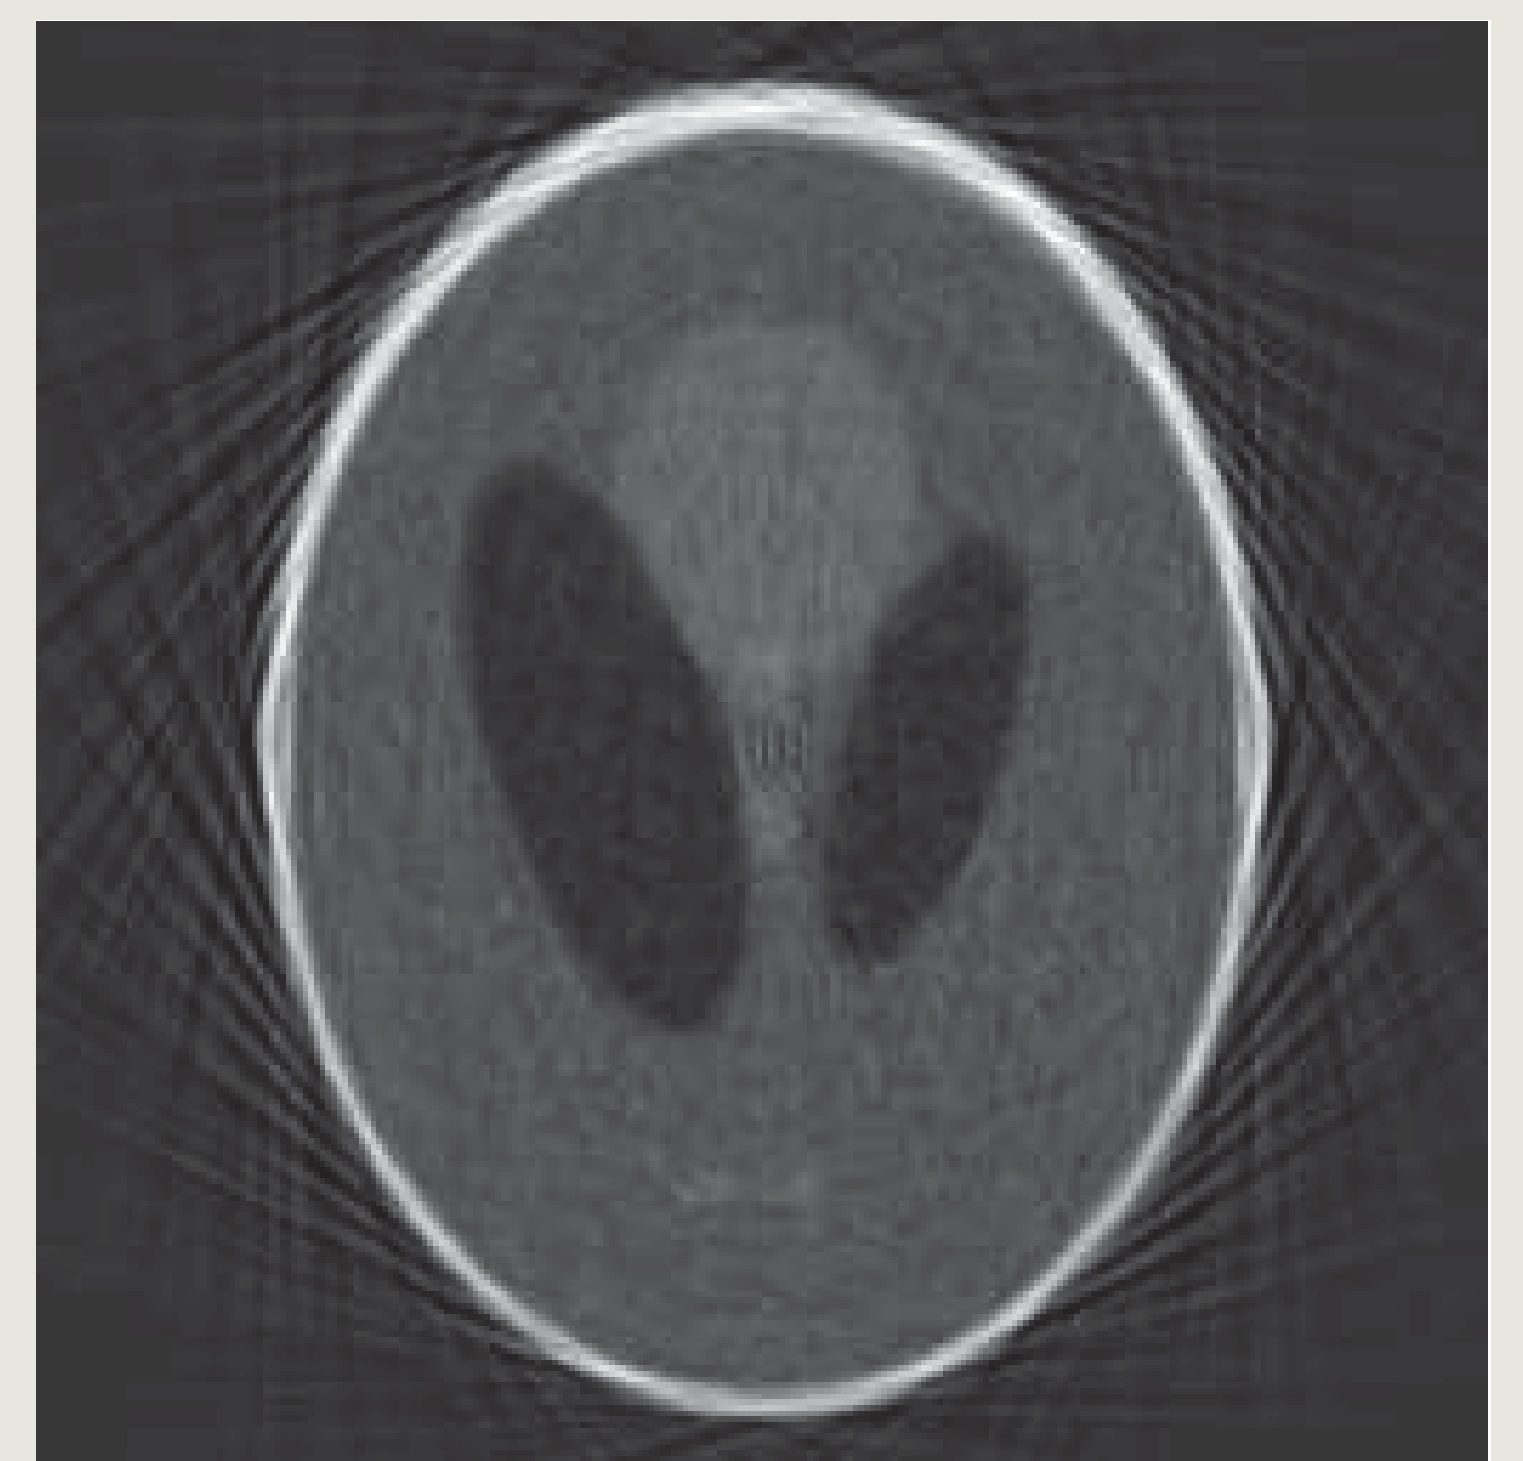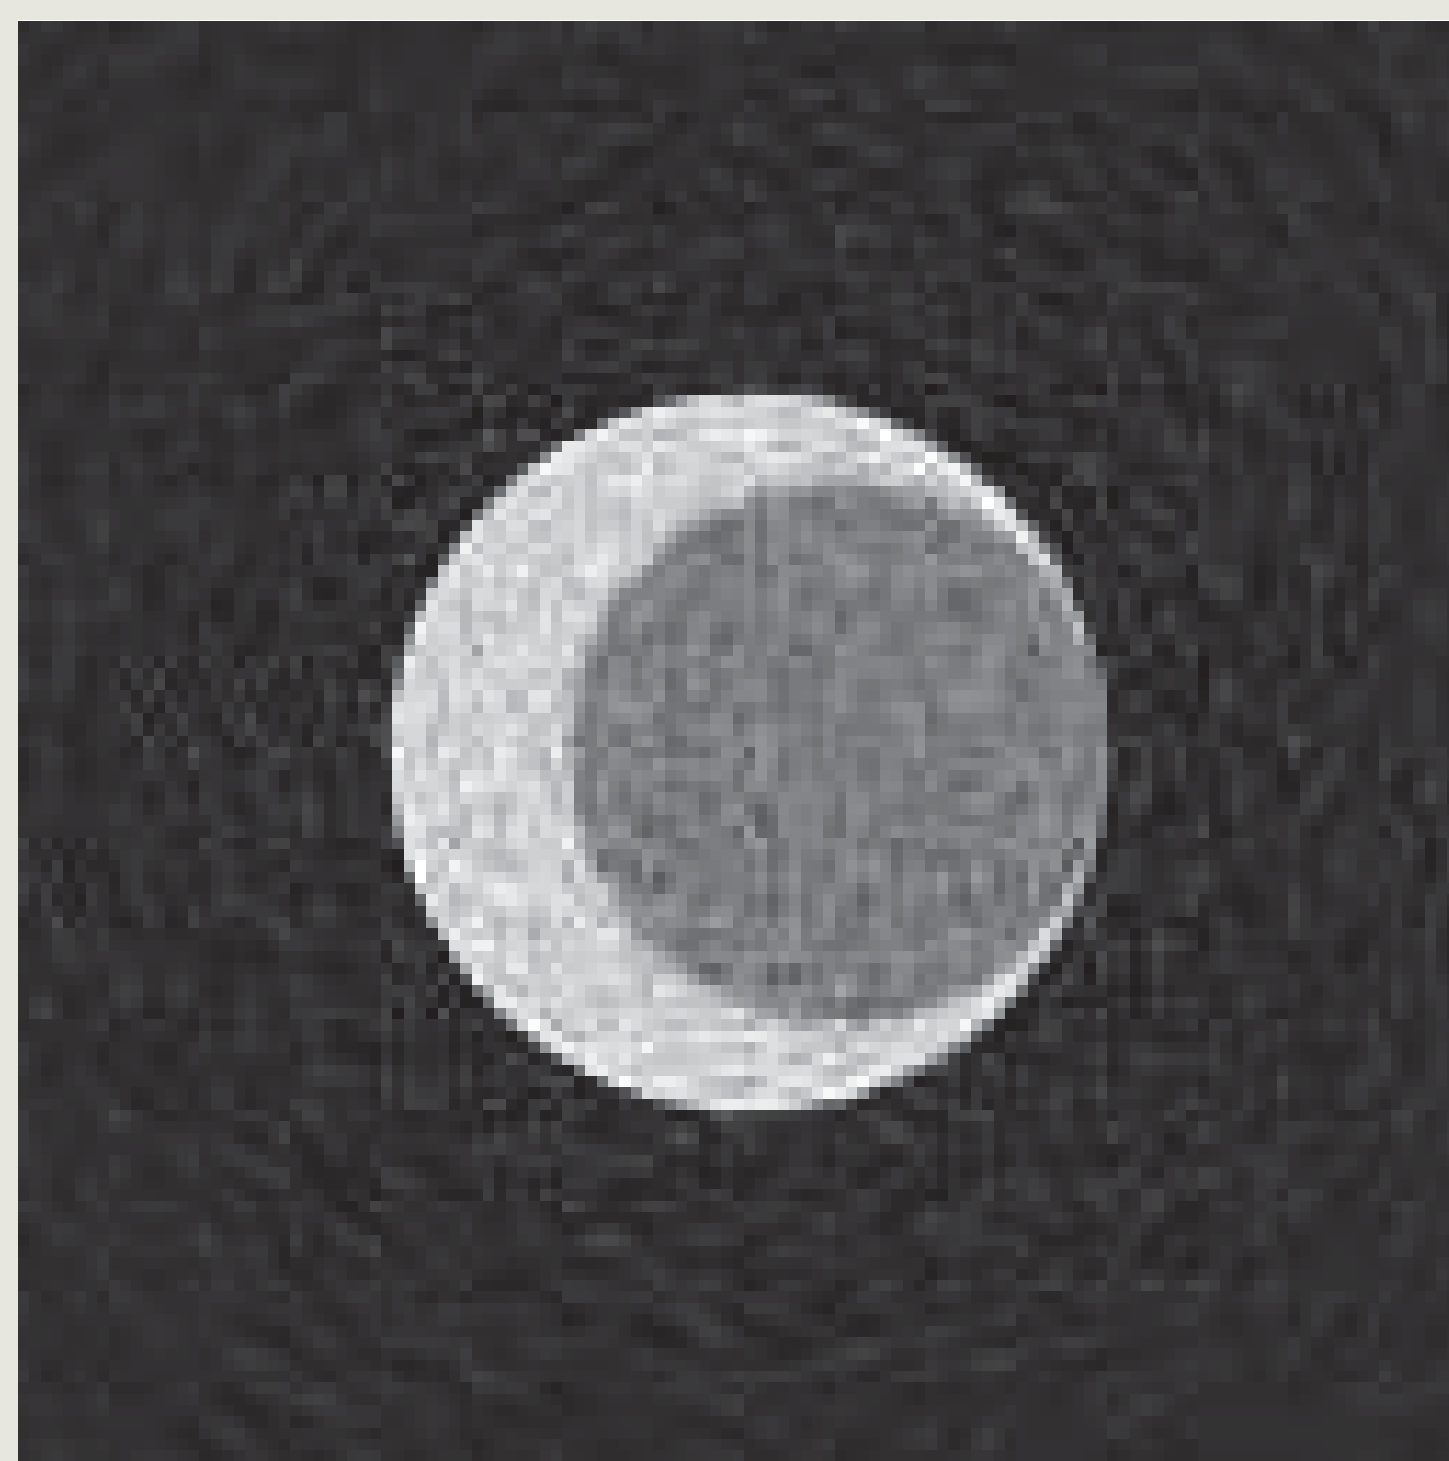
Our approach overcomes the problem of the standard kernel method: if no weights are used, each radial kernel gives singular matrices.

NUMERICAL EXAMPLES

AIR Tools package [6] / **Gaussian Kernel**

Crescent - Shape
(full data - no noise)

Bull's Eye
(white noise with $\sigma = 0.05$)

Shepp -Logan
(missing 40% of the Radon lines)

BENEFITS

- The reconstruction matrix is **symmetric** and **positive definite**.
- We can make use of theory of change of basis for RBF, in particular the Newton basis [3] allows to **recursively select** the Radon lines which minimize the error.
- It is possible to reconstruct images from **missing** or scattered **data**.
- The dimension of the linear system is independent on k.

WORK IN PROGRESS

- The kernel's and the weights' shape strongly depend on some parameters which are not yet fully optimized.
- The method is for now limited to the Gaussian kernel: we plan to extend it to other RBF kernels.
- The computational cost of the algorithm can be reduced using compactly supported kernels and weights functions.

REFERENCES

[1] S. De Marchi, A. Iske and A. Sironi, *Kernel-based image reconstruction from scattered Radon data by positive definite function.* preprint
[2] H. Wendland, *Scattered Data Approximation.* Cambridge University Press, 2005
[3] M. Pazouki and R. Schaback, *Bases for Kernel-Based Spaces.* Journal of Computational and Applied Mathematics, Volume 236 Issue 4, September, 2011 Pages 575-588
[4] T. G. Feeman, *The Mathematics of Medical Imaging. A beginner's guide.* Springer, 2010
[5] S. R. Deans, *The Radon Transform and some of its applications.* Dover pubblications, inc, New York 2007
[6] C. Hansen and M. Saxild-Hansen, *AIR Tools−A MATLAB package of algebraic iterative reconstruction methods.* Journal of Computational and Applied Mathematics, Volume 236, Issue 8, February 2012.